

Roadmap to an Electron Beam or X-ray Center for Industrial Applications

Meissner Consulting GmbH


Dr. Joern Meissner

Prof.-Messerschmitt-Str. 3a

D-85579 Neubiberg (München)

phone +49 89 30765220

email meissner@meissner-consulting.com

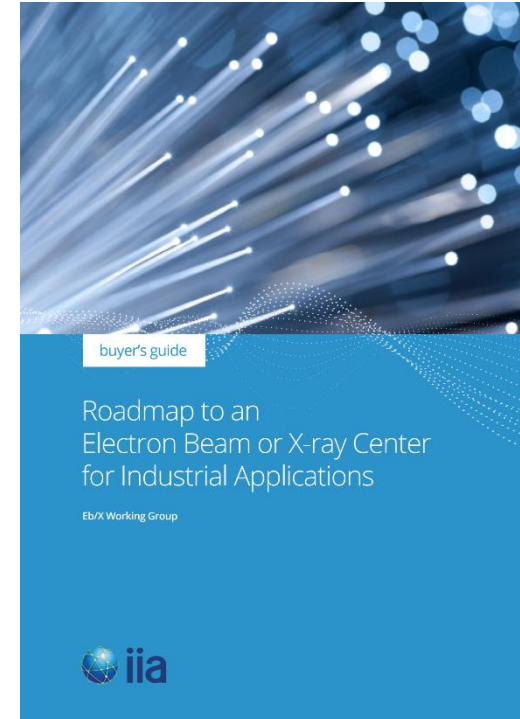

Introduction

Many New-Comers experience lack of easily accessible information on

- what E-beam and X-ray could do for their process
- unbiased technology comparison
- where to find unbiased advice
- available suppliers for key systems
- how to perform a feasibility analysis and establish a bankable business plan for a technology new to them

As a result:

- their project gets delayed,
- does not get off the ground,
- becomes too expensive for their purpose,
- lacks financing

➔ Need an easy-to-follow Roadmap without too much technological detail

Purpose



- **Enable EB/X-ray project developers**, prospective buyers or users of EB/X-ray technologies, and investors in such projects to perform an effective feasibility and business plan analysis.
- It shall enable them to find **supplier-independent information**, identify other players than the market leading EB/X-ray solution providers.
- Refer to - instead of Duplicate - available Information



Primary Target Markets



- Medical Device Sterilization / Combination Products / Pharmaceutical Sterilization / Consumer products (e.g. >10 kGy sterilization dose); production integrated as well as external service centers
- Phytosanitary Treatment for Quarantine control, Import/Export, bio security (e.g. ≤ 1 kGy, fruit and vegetables)
- Food Irradiation (e.g. dried fruit, spices, pet foods, meat products)
- Polymer irradiation with high energy beams
 - using tray based conveyors, such as tubing, granular
 - using strand based product handling, such as wire & cable

Ready to Cut the Ribbon on your new E-Beam or X-ray facility?


- Enlarging the capacity in a growing market
- Transition to E-beam / X-ray
- Phase-Out of chemical processes
- Meet regulatory requirements
 - Bio-security
 - Sterility
 - Radioactive material transport
- Supply chain issues

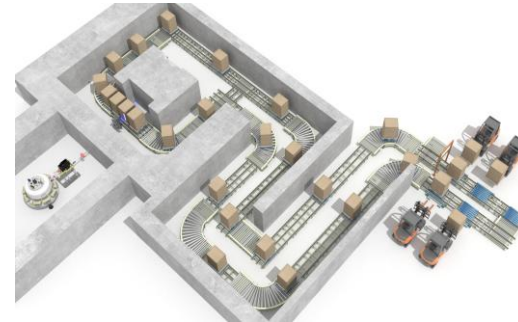

Process How to get There

You need to make some decisions


- What are your products?
 - What is your packaging?
 - What is your Dose Uniformity requirement – per product?
 - min Dose: process effectiveness
 - max acceptable Dose: Product integrity
- best fit Technology = DUR & Dose Limits
- But is this also the best fit for the budget?

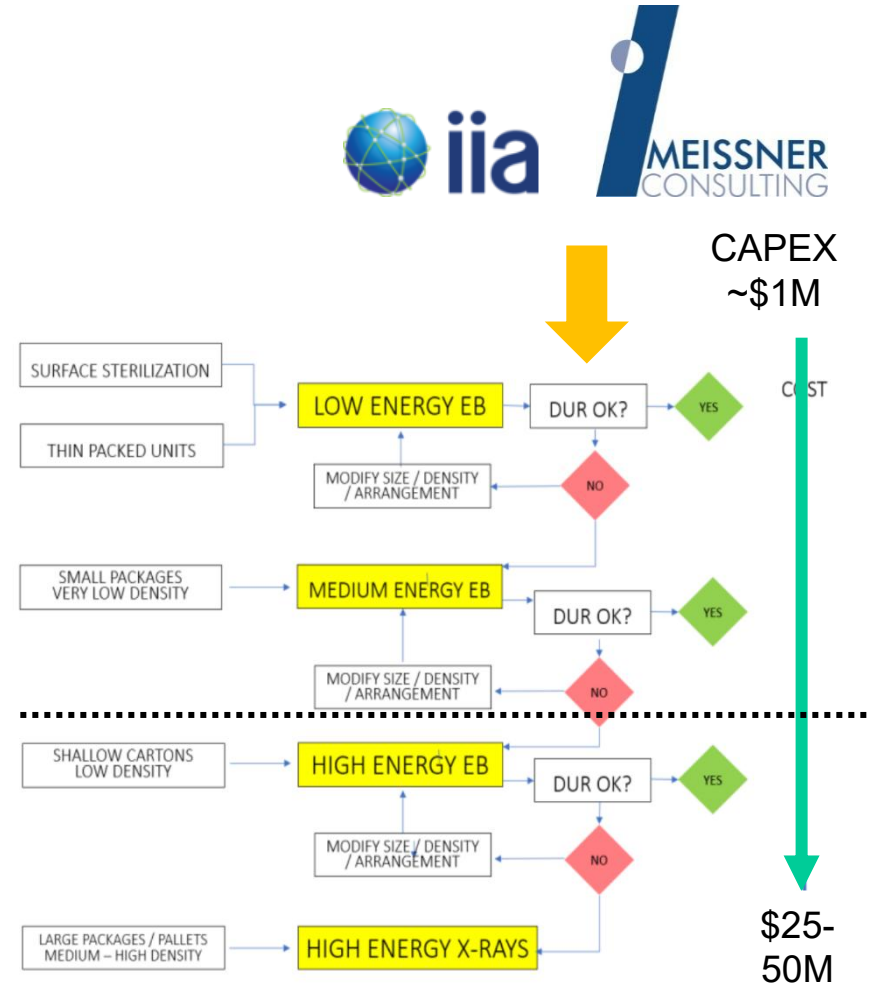

Phytosanitary Treatment / Sterilization

Electron Beam

- Treatment in boxes
- Best ROI – if it works with the product

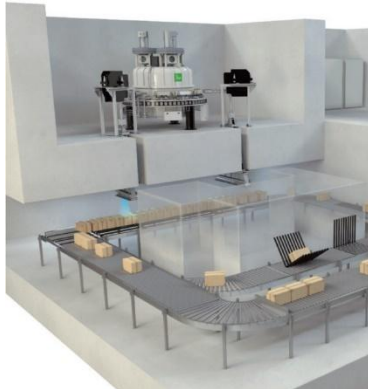

X-ray

- Pallet integrity, no packaging changes
- Radiation on/off
- Best dose uniformity
- Scalable production
- Quick product change
- Very high electricity requirement




Gamma

- Pallet integrity, no packaging changes
- continuous production
- Simple operation
- Slower product changes
- Low electricity consumption, but Co-60 decay
- Co-60 availability and transport





E-Beam: Dose Uniformity Ratio (DUR) & Product Qualification

- Typ. densities $< 0.3\text{g/cm}^2$ (10 MeV)
 - packaging size, direction of beam
 - arrangement inside the packaging
 - often treatment from two sides
 - Density differences within product are critical for e-beam.
- for business & capacity planning
- modelling
 - dose map
 - use expert support!

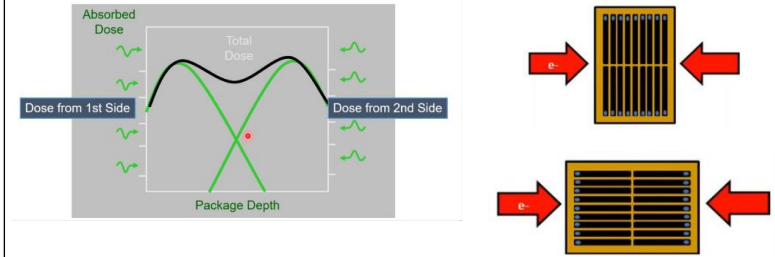

Credit: iia buyers guide, Steris AST


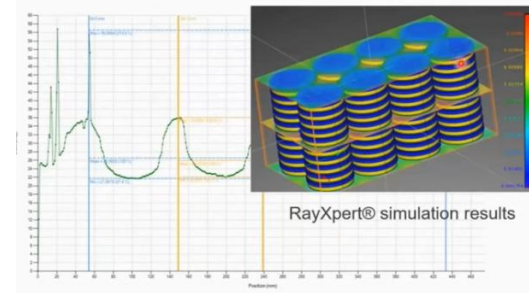


Credit: IBA, AERIAL, TRAD RayXpert

X-ray: Dose Uniformity Ratio (DUR) & Product Qualification


- pallet processing, DUR increase with ρ
 - always treatment from two sides
 - average density planning; also for high density fruits
 - Production Capacity system dependent – no simple formula
- for business & capacity planning
- modelling for complex products
 - dose map
 - Experimental verification of throughput

Complex Product Two sided

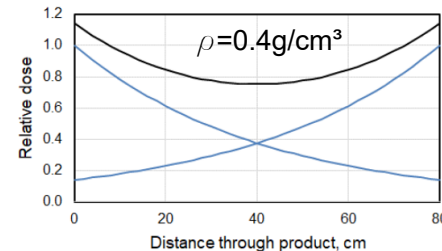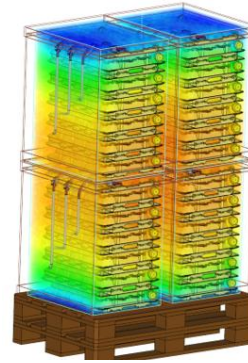

Credit: Sartorius, Irradiation Panel, IBA, TRAD (RayXpert)

Dose Rate Simulation

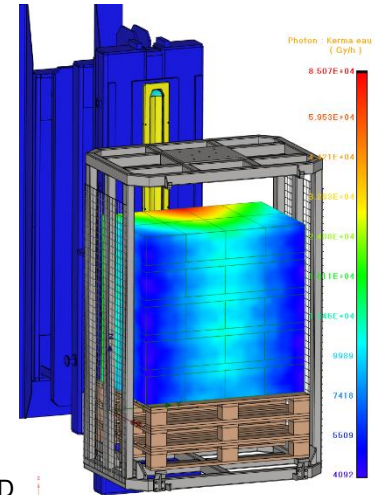

Optimize your Business Case

- Energy (MeV) – fit for the product
 - accelerator
 - Shield
- Power (kW) – fit for the next 5-10yrs
 - accelerator & building MEP
 - product handling system / automation
 - utility cost: electricity ~3x beam power
- X-ray instead of E-beam – a CAPEX step
- turnkey = project risk on vendor side \$\$\$
- carefully review your product needs with experts
 - Energy and Power – E-beam vs X-ray
 - packaging & dose distribution optimization
- consider risk mitigation by experts on your side



System	Energy range	Shielding type	Shielding material	Shielding footprint	typ Project Cost
Low energy EB	< 300 keV	Self-shielded	steel, lead	up to 60m ²	\$100k - \$1M
Low to Medium Energy EB	500 keV - 3 MeV				\$500k - several \$1M
Medium energy EB	2 - 8 MeV	self-shield or bunker	steel, lead, concrete	up to 200m ²	several \$1M
High energy EB	8-13 MeV	large bunker	concrete	400-500m ²	> \$10M
High energy X-ray	5– 7.5 MeV				> \$25M

Constraints and Risks

- Op cost: Maintenance, staff, utilities
- Certification, Ramp-up, small batches/partial carriers
- customer requirements and inter-product compatibility
- community acceptance, radiation safety
- utility outages, supply chain, staffing

Thank You!

Meissner Consulting GmbH

Prof.-Messerschmitt-Str. 3a

85579 Neubiberg (München)

phone +49 89 30765220

cell +49 179 5414652

email meissner@meissner-consulting.com



Credits & Source of Images:

- iia Buyers guide
- iia Roadmap
- IBA Webinar / AERIAL / TRAD (RayXpert)
- Steris AST
- LTXD
- IBA